

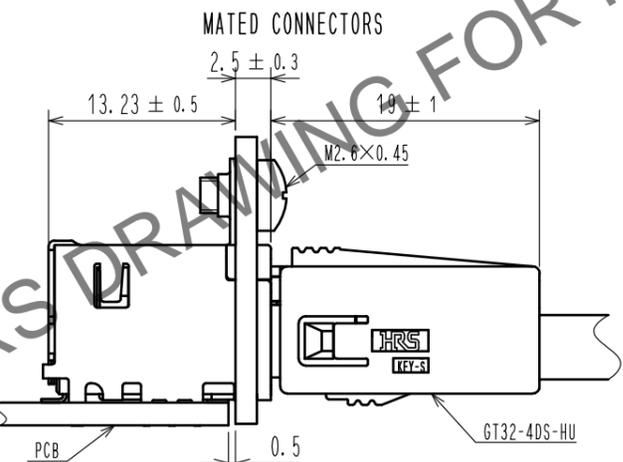
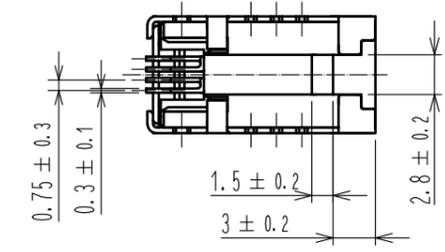
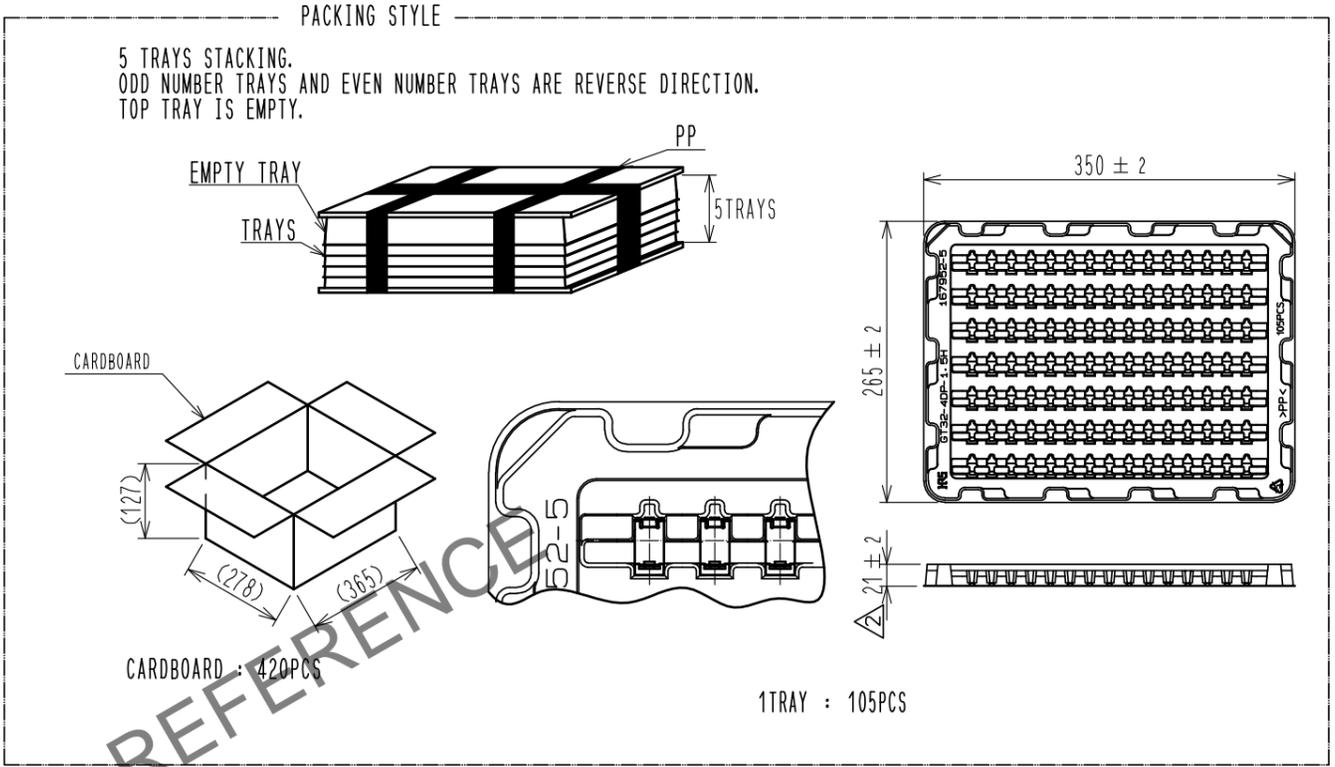
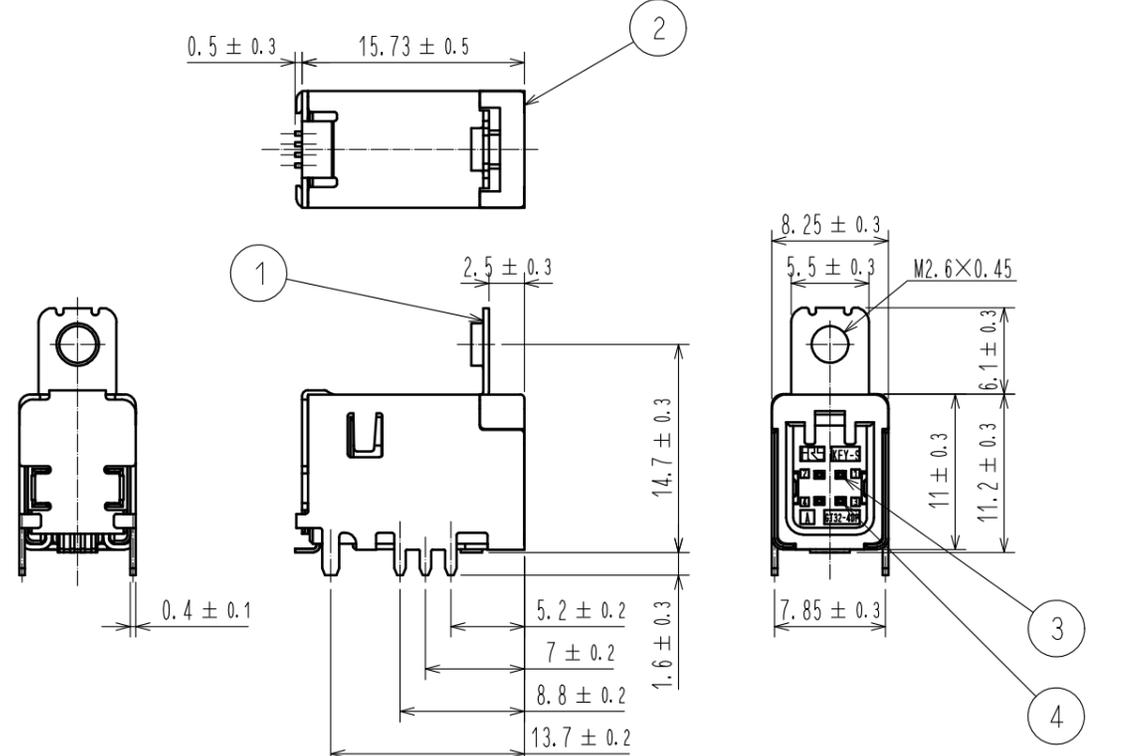
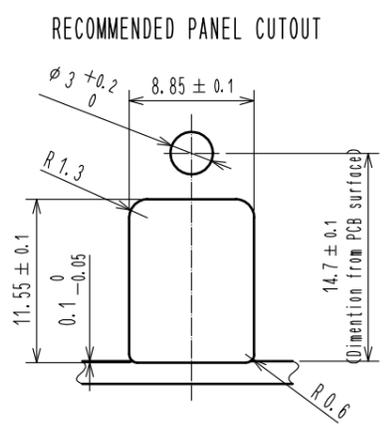


Jan.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

ELV, RoHS COMPLIANT

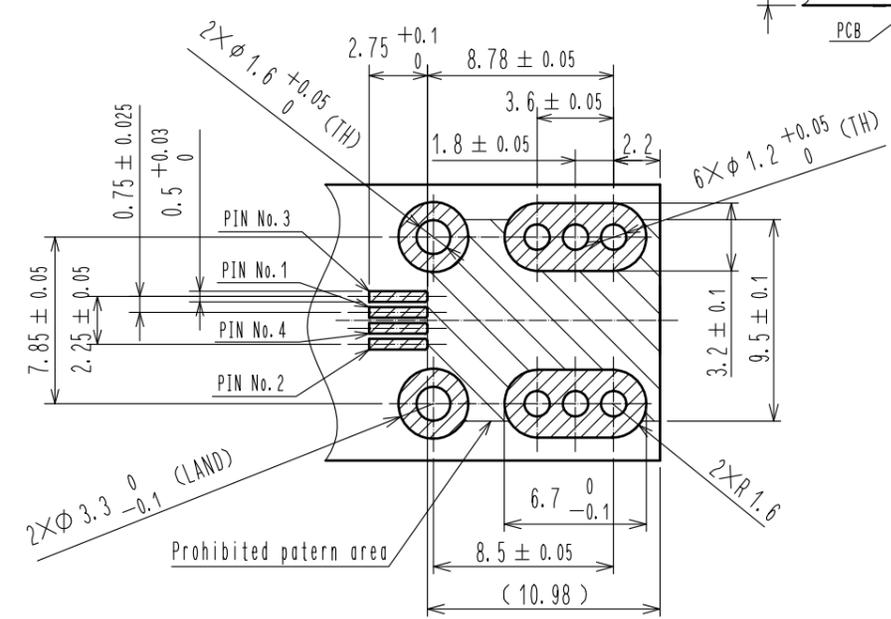

- NOTES
- RECOMMENDED REFLOW PROFILE (SEE RIGHT GRAPH)
 CYCLE TIME: UP TO 2 CYCLES OF REFLOW SOLDERING ARE POSSIBLE UNDER THE CONDITIONS. PROVIDED THAT THERE IS A RETURN TO NORMAL TEMPERATURE BETWEEN THE FIRST AND SECOND CYCLE.
 PEAK TEMPERATURE: 250°C
 230°C MIN. FOR 20 TO 40 SECONDS.
 PREHEATING AREA 150~180°C FOR 60 TO 120 SECONDS.
 - HAND SOLDERING: 280~300°C, 2SECONDS MAX.
 - CONTACT COPLANARITY: 0.1mm MAX.
 - RECOMMENDED THICKNESS OF PCB: 1.6mm
 - RECOMMENDED THICKNESS OF SOLDERING PASTE: 0.12mm

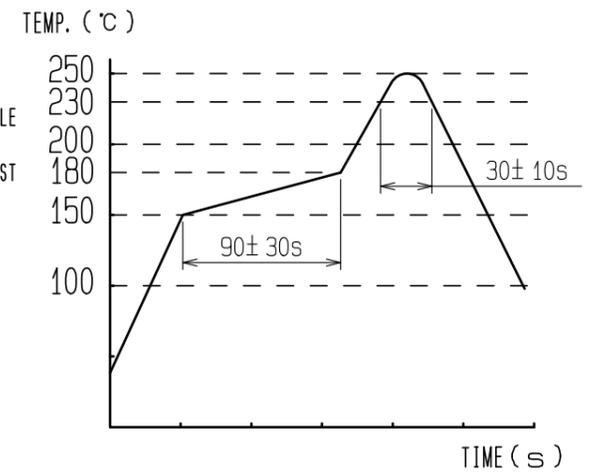

2	PA	DARK GRAY	4	BRASS	TIN PLATING		
1	COPPER ALLOY	TIN PLATING	3	BRASS	TIN PLATING		
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS		
UNITS	mm	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
		2 : 1	1	DIS-T-00003672	TS. KUBOTA	TH. MIZUGUCHI	18. 08. 07
APPROVED : NH. NAKATA		14. 03. 08		DRAWING NO. EDC3-353182-00			
CHECKED : TS. KUBOTA		14. 03. 07		PART NO. GT32-4DP-1.5H			
DESIGNED : NK. IKUTA		14. 03. 06		CODE NO. CL782-0038-1-00			
DRAWN : NK. IKUTA		14. 03. 06					