


Feb.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

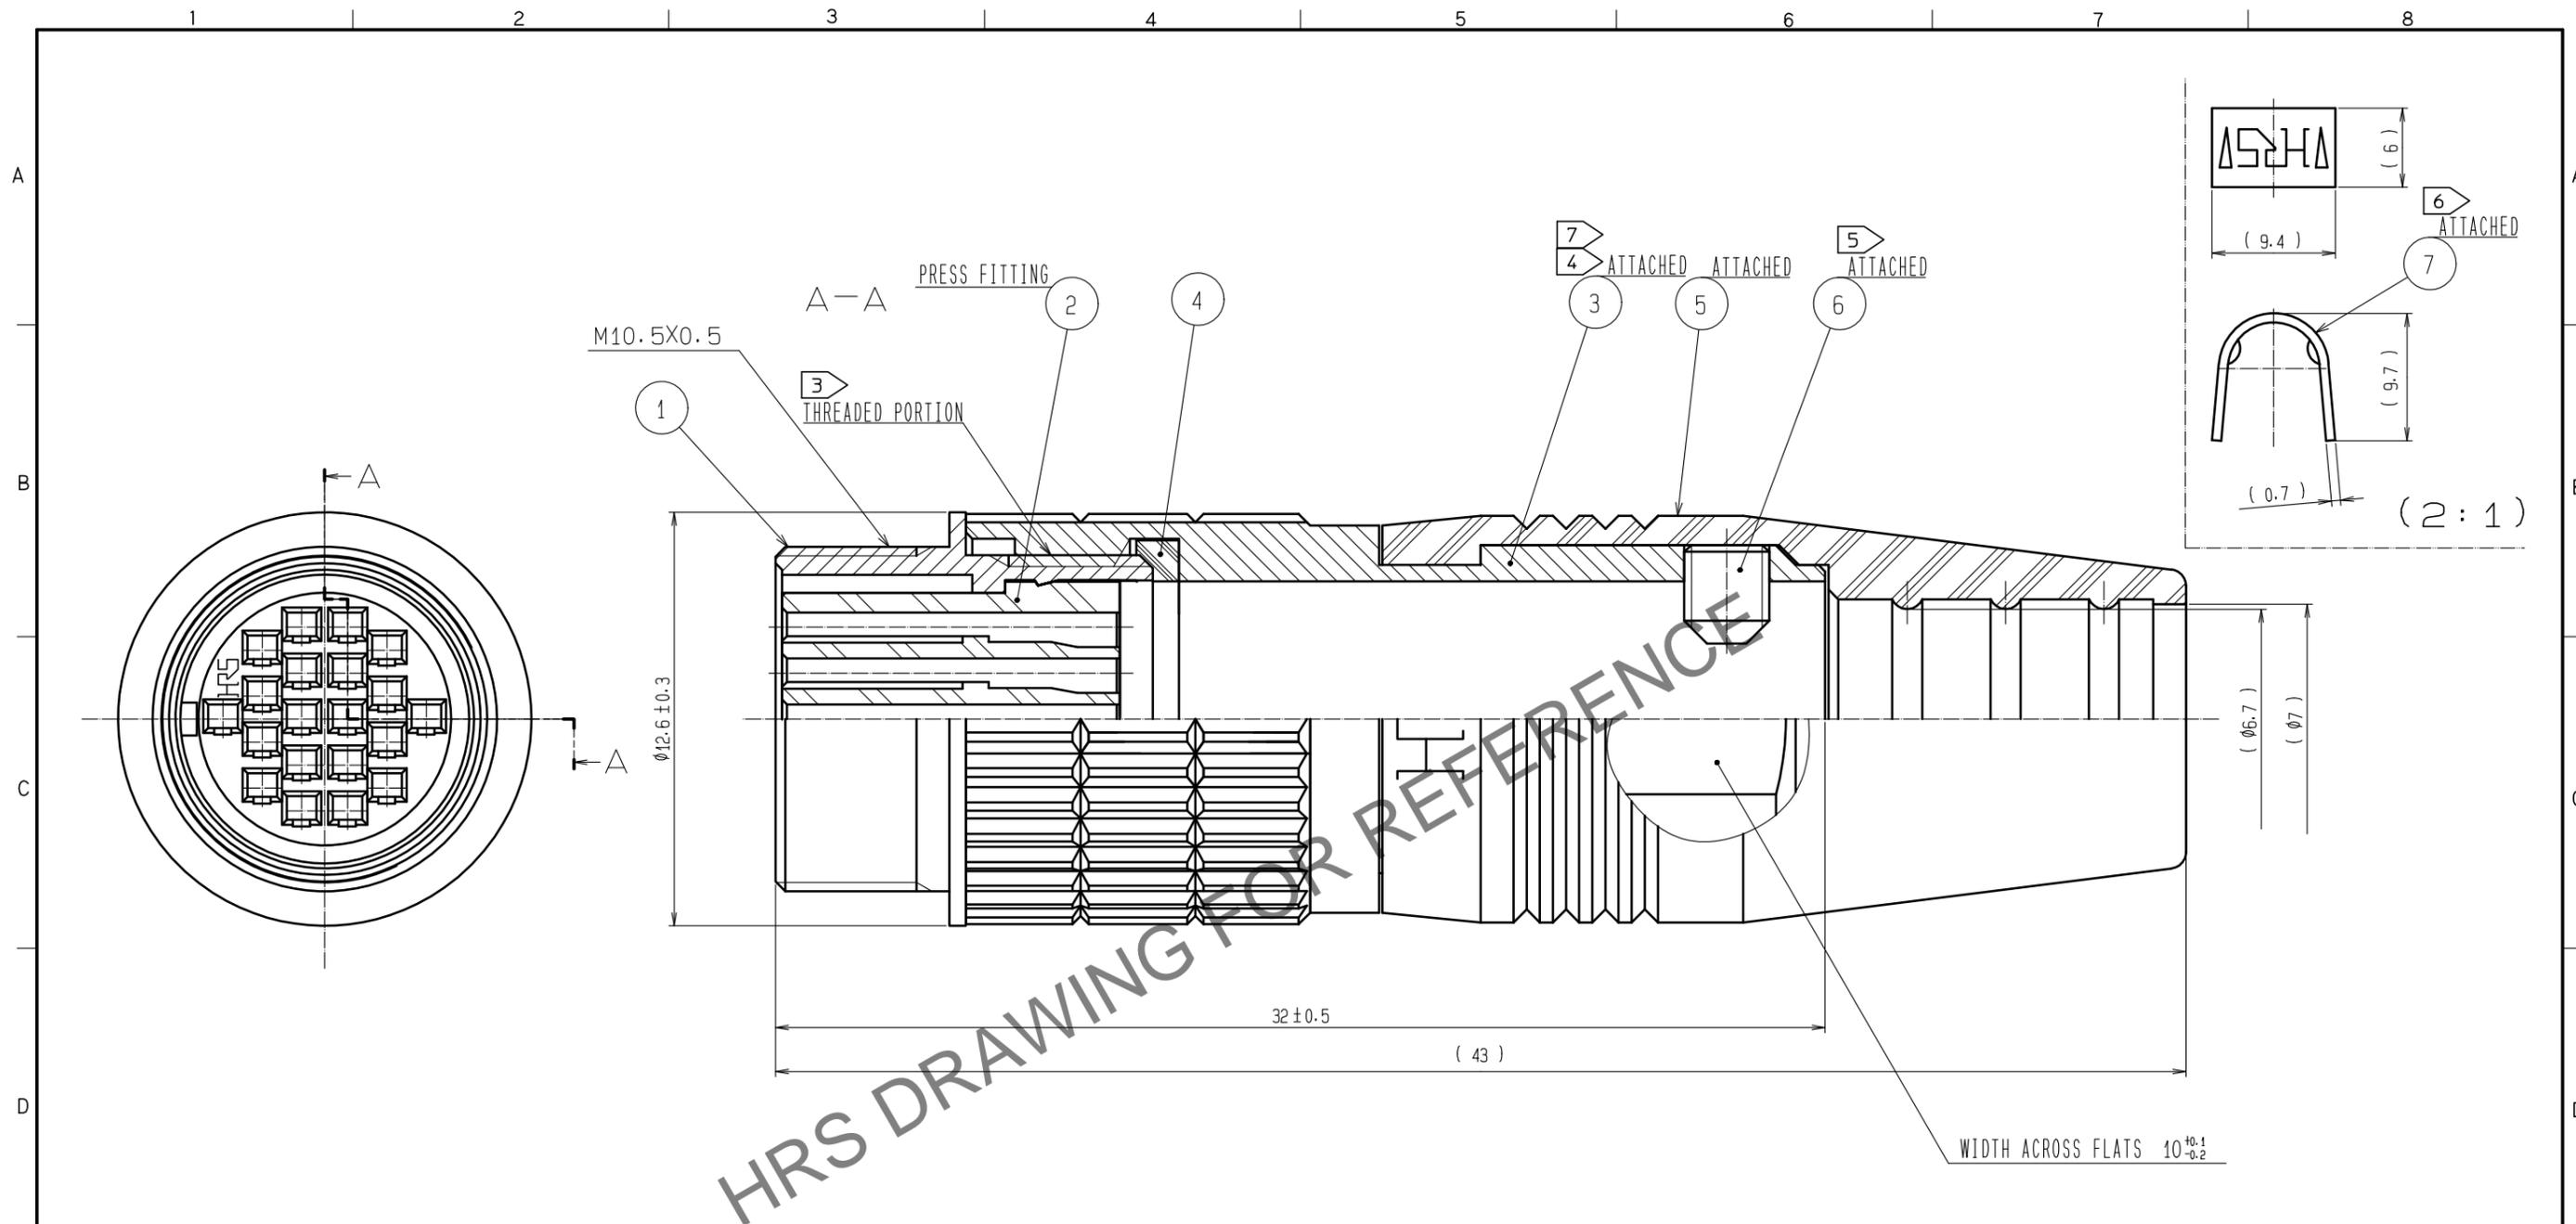

- NOTES
- 1 APPLICABLE CRIMP CONTACT :HR25-SC-211(CL125-0422-6)  
(APPLICABLE WIRE:AWG#30,WIRE JACKET DIAMETER:φ0.71 MAX.)
  - 2 APPLICABLE CONTACT REMOVAL TOOL(EXTRACTION TOOL:HR25-TP(CL150-0091-0))
  - ③ THREAD PORTION OF REF.No.① AND ③ IS APPLIED WITH PRECOATING TO PREVENT LOOSENESS.  
HOWEVER, THE ADHESIVE EFFECTIVENESS IS DECREASED WHEN REUSED.  
THEREFORE, THREAD PORTION IS RECOMMENDED TO COAT WITH LOCTITE 263 MANUFACTURED BY HENKEL JAPAN OR EQUIVALENT.
  - ④ THE RECOMMENDED TIGHTENING TORQUE OF REF.No.③ TO BE 1N·m.
  - ⑤ THE TIP OF REF.No.⑥ SHALL BE FIXED TO THE CONCAVE PORTION WITH REF.No.⑦ CLAMPED TO THE CABLE.  
OPPOSITE SIDE DIMENSION OF A HEXAGON SOCKET OF REF.No.⑥ IS 1.27mm.  
AND THE RECOMMENDED TIGHTENING TORQUE OF REF.No.⑥ TO BE 0.3 TO 0.4 N·m.
  - ⑥ MANUAL CRIMPING TOOL OF REF.No.⑦ : HR10A-TC-02(CL150-0041-2)(THE HOLE DIAMETER FOR CRIMPING:φ7)
  - ⑦ REF.No.④ IS INCLUDED IN REF.No.③.
  - 8 ONE EXAMPLE OF THE ROTATION OF REF.No.③ TO REF.No.① IS SHOWN.
  - 9 THE CABLE PULL AND TWISTING STRENGTH AND OTHER CHARACTERISTICS MAY DIFFER,DEPENDING ON THE CABLE STRUCTURE.  
PLEASE CONFIRM BEFORE THE USE.

NO.	MATERIAL	FINISH .	REMARKS	NO.	MATERIAL	FINISH .	REMARKS
4	ETHYLENE PROPYLENE RUBBER	(BLACK)		7	BRASS		
3	BRASS	NICKEL PLATING		6	STEEL	NICKEL PLATING	JIS B 1177 HEXAGON SOCKET SCREW M2.6X0.45X3
2	POLYPHENYLENE SULFIDE	(BLACK) UL94V-0		5	ETHYLENE PROPYLENE RUBBER	(BLACK)	
1	ZINC ALLOY	MATTE FINISH NICKEL PLATED					

UNITS	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	5 : 1	△				
APPROVED :EJ. KUNII			15.10.14	DRAWING NO. EDC-110398-72-00		
CHECKED :EJ. KUNII			15.10.14	PART NO. HR25-9TJ-20SC(72)		
DESIGNED :MM. ISHII			15.10.14	CODE NO. CL125-0417-6-72		
DRAWN :MM. ISHII			15.10.14	1/1		