

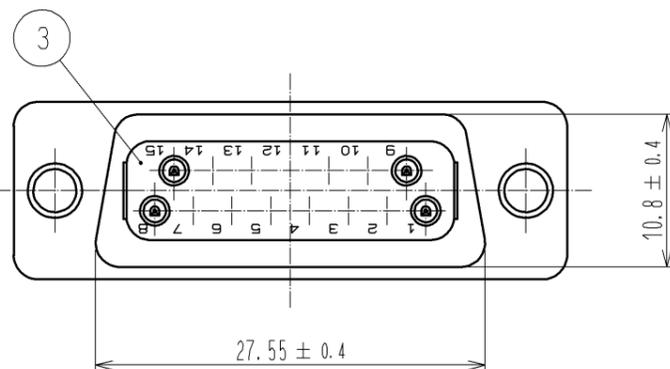
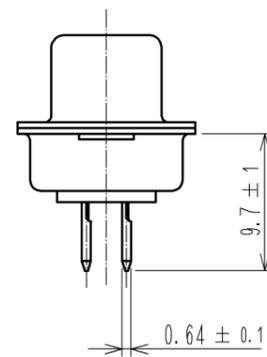
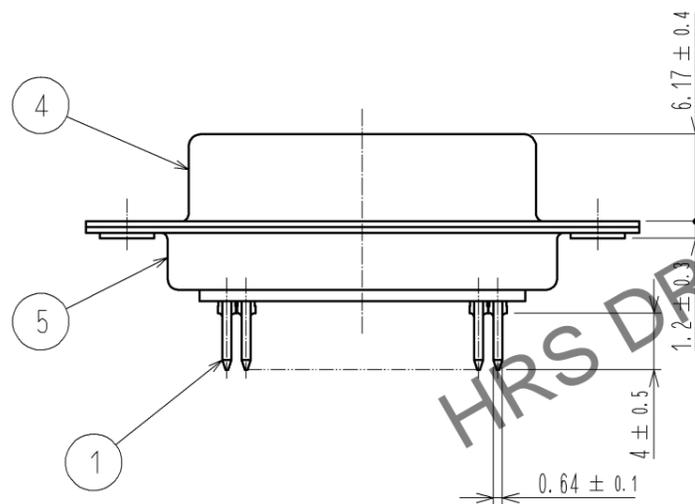


Sep.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

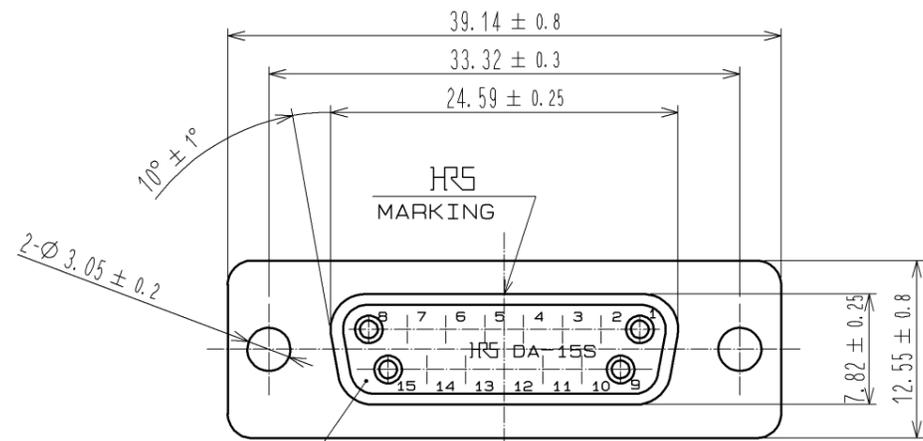

1 RECOMMENDED PC BOARD PATTERN

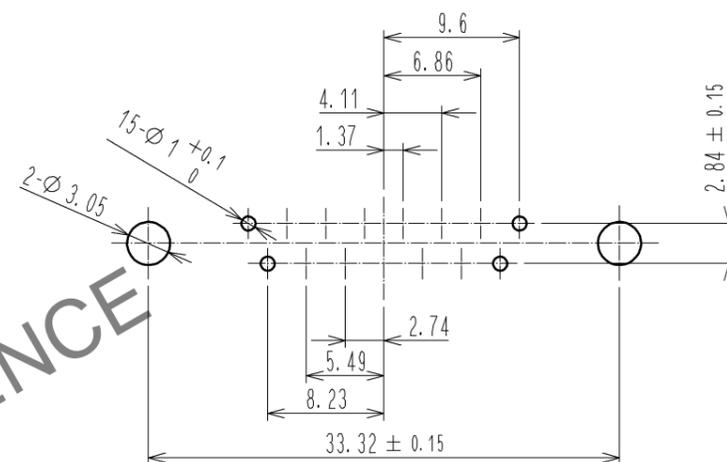

NOTE 1 TOLERANCES SHALL BE ± 0.1 OR LESS UNLESS OTHERWISE SPECIFIED.

2	PBT	BLACK UL94V-0	5	STEEL	OVER-NICKEL 1 μm MIN. UNDER-COPPER 5 μm MIN.			
1	PHOSPHOR BRONZE	CONTACT:GOLD 0.2 μm MIN. LEAD:GOLD 0.03 μm MIN. UNDER-NICKEL 2 μm MIN.	4	STEEL	OVER-NICKEL 1 μm MIN. UNDER-COPPER 5 μm MIN.			
			3	PBT	BLACK UL94V-0			
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS			
UNITS	⊕	SCALE	COUNT	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
mm		2 : 1	△					
<b>HRS</b> HIROSE ELECTRIC CO., LTD.		APPROVED : RI. TAKAYASU	13.02.22	DRAWING NO.		EDC3-009837-04		
		CHECKED : EJ. WAKATSUKI	13.02.22	PART NO.		SDAB-15S(55)		
		DESIGNED : MO. SHIMOYAMA	13.02.22	CODE NO.		CL211-0250-8-55		
		DRAWN : MO. SHIMOYAMA	13.02.22			△ 1/1		