


Oct.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

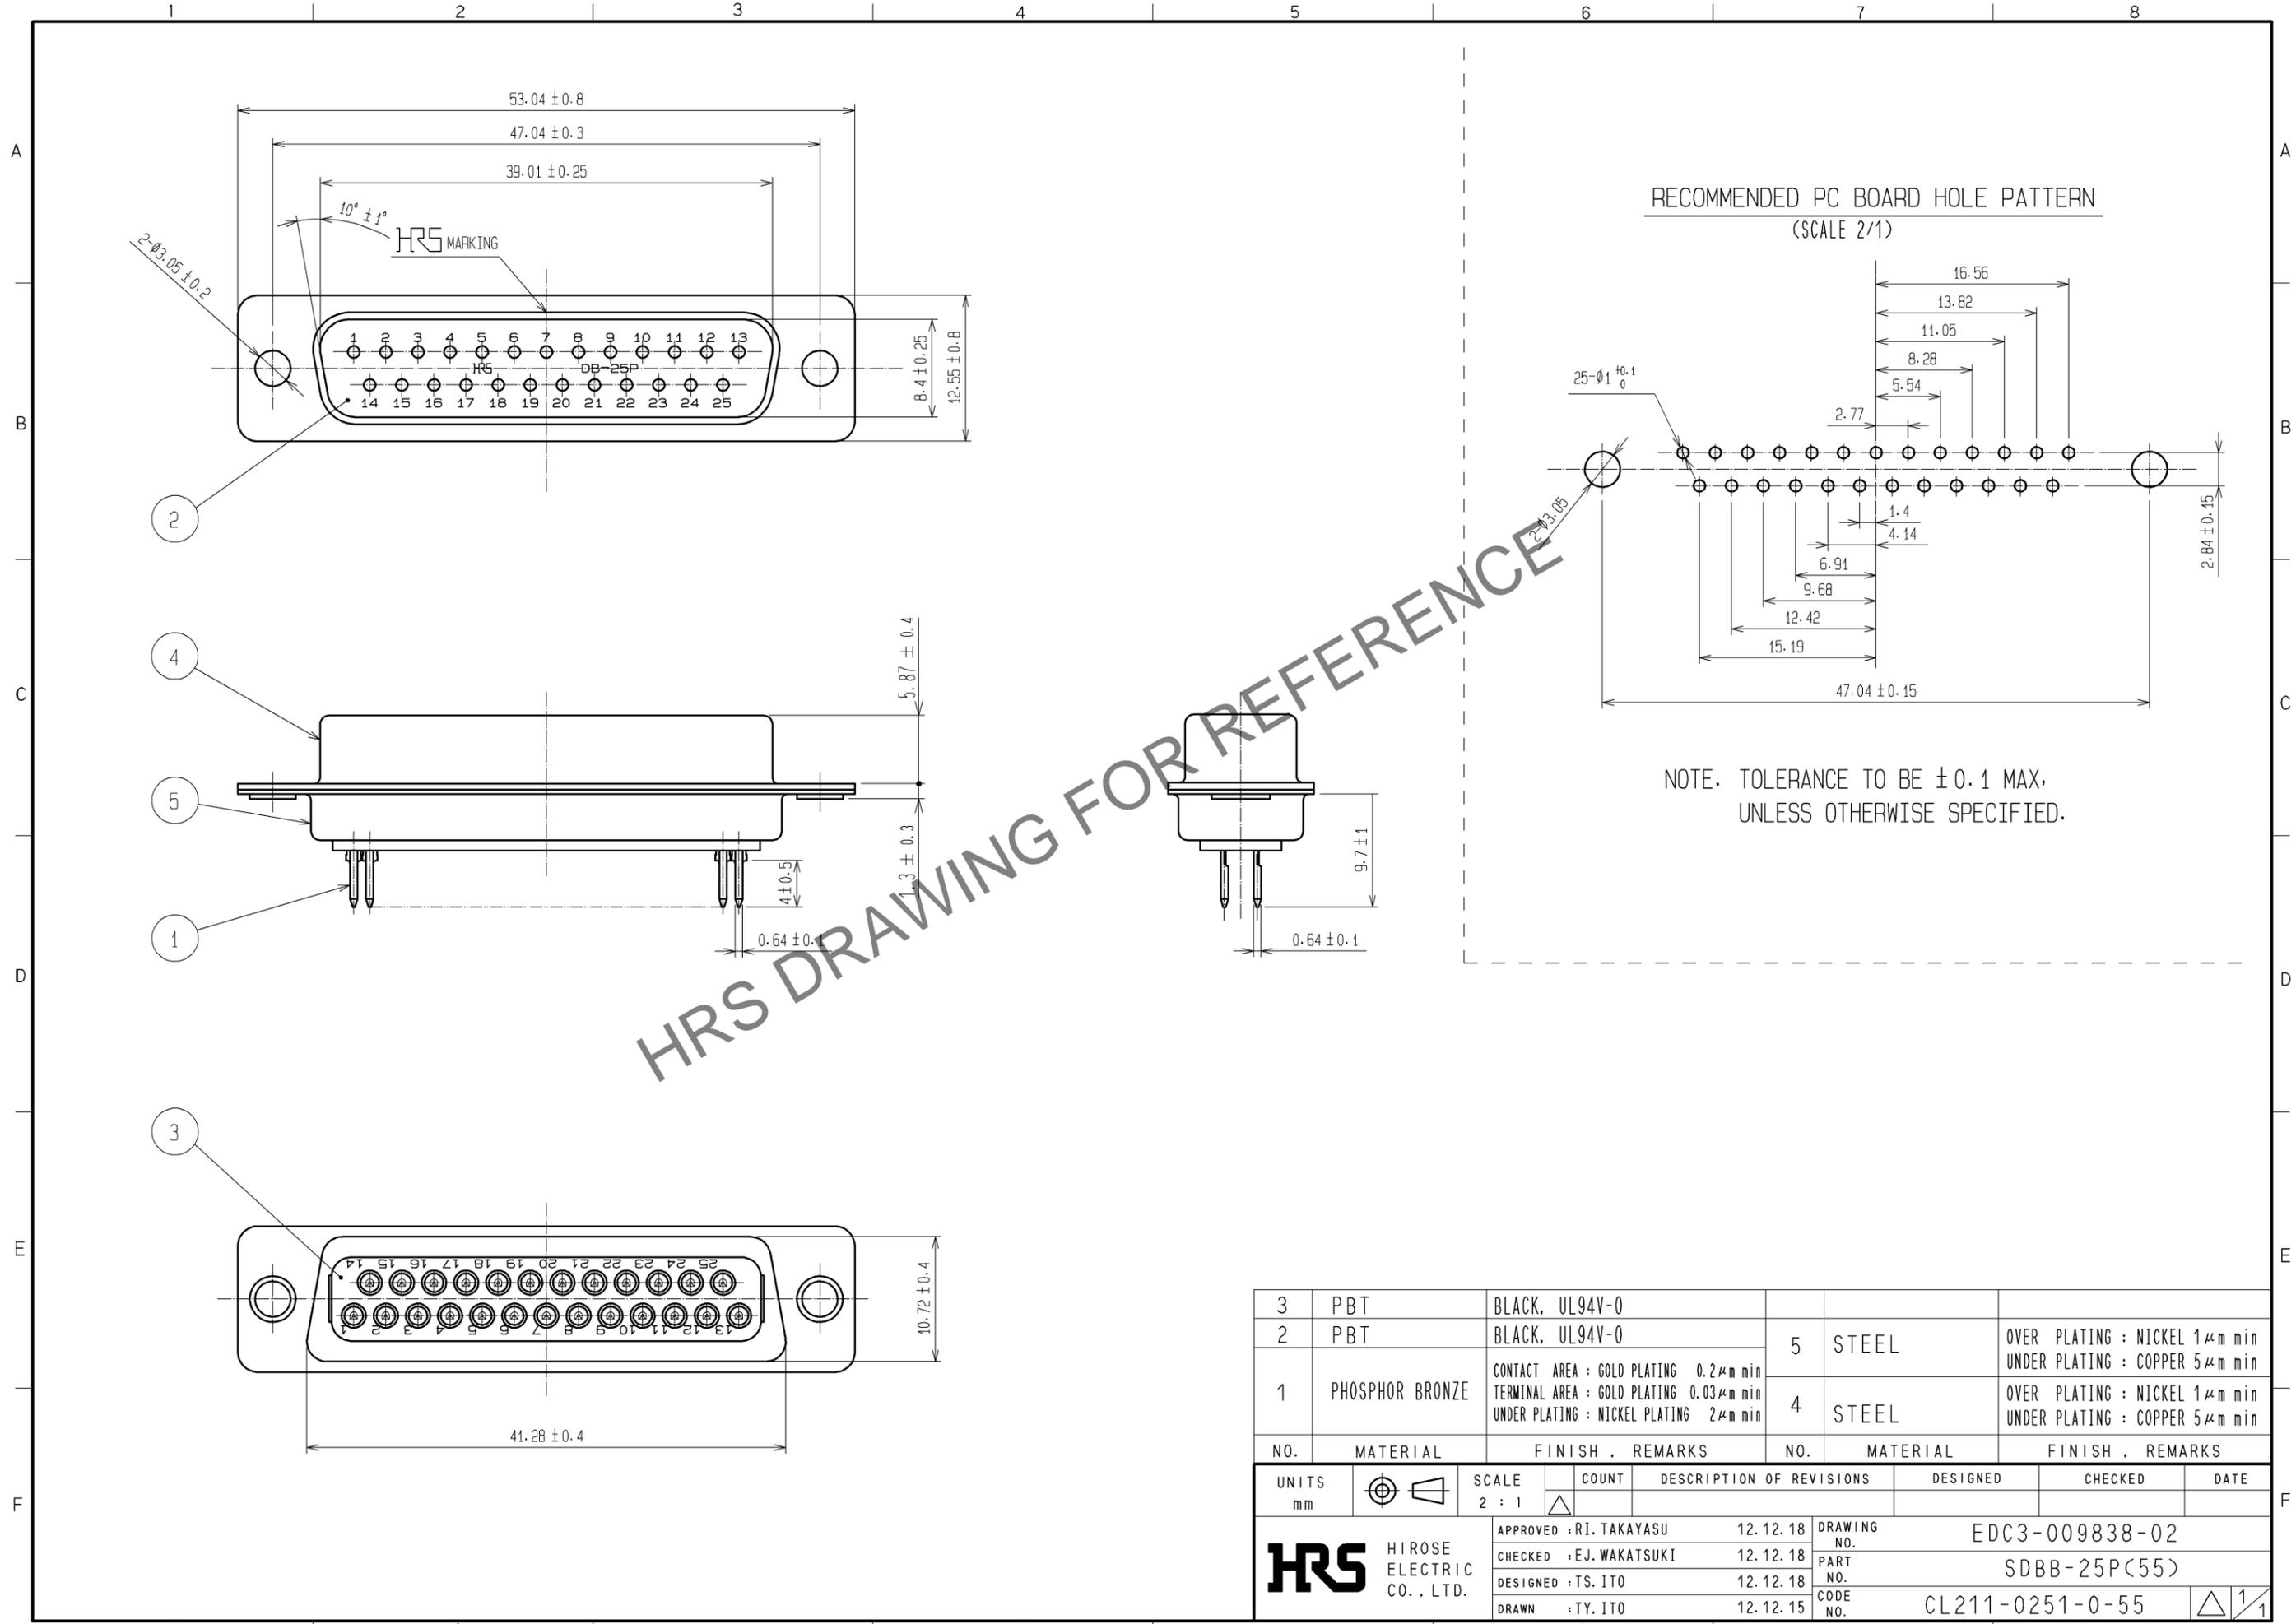

HRS DRAWING FOR REFERENCE

RECOMMENDED PC BOARD HOLE PATTERN  
(SCALE 2/1)

NOTE. TOLERANCE TO BE ± 0.1 MAX,  
UNLESS OTHERWISE SPECIFIED.

3	PBT	BLACK, UL94V-0			
2	PBT	BLACK, UL94V-0	5	STEEL	OVER PLATING : NICKEL 1μm min UNDER PLATING : COPPER 5μm min
1	PHOSPHOR BRONZE	CONTACT AREA : GOLD PLATING 0.2μm min TERMINAL AREA : GOLD PLATING 0.03μm min UNDER PLATING : NICKEL PLATING 2μm min	4	STEEL	OVER PLATING : NICKEL 1μm min UNDER PLATING : COPPER 5μm min
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
UNITS mm		SCALE 2 : 1	COUNT △	DESCRIPTION OF REVISIONS	
DESIGNED		CHECKED		DATE	
APPROVED : RI. TAKAYASU		12.12.18		DRAWING NO. EDC3-009838-02	
CHECKED : EJ. WAKATSUKI		12.12.18		PART NO. SDBB-25P(55)	
DESIGNED : TS. ITO		12.12.18		CODE NO. CL211-0251-0-55	
DRAWN : TY. ITO		12.12.15		△ 1/1	