



FEATURES:

- Standard available frequencies: 10.00, 12.80, 19.20, 20.00, 25.00, 26.00, 30.72, 40.00, 50.00MHz
- Standard LVC MOS Output
- Frequency stabilities to include ± 100 ppb over -40°C to $+85^{\circ}\text{C}$, ± 280 ppb over -50°C to $+90^{\circ}\text{C}$ and ± 500 ppb over -55°C to $+95^{\circ}\text{C}$ operating temperature range
- Excellent Phase Noise, Harmonics and Spurious content
- Typical rms jitter of 400fs @ 40MHz carrier & 1.0ps @ 10MHz carrier over 12kHz to 20MHz BW

APPLICATIONS:

- COTS Military Radios & other Communication Hardware
- WiMax,
- LTE, BTS
- CATV, LAN, LMDS
- GPS Tracking with Hold-Over accuracy
- Test & Measurement Equipment
- Point-to-Point communication networks

STANDARD SPECIFICATIONS:

Maximum Rating

Parameters	Rating
Storage Temperature Range	-55 to $+125^{\circ}\text{C}$
Supply Voltage	-0.5 to 6V
ESD, HBM/CDM/MM	$4\text{kV}/2\text{kV}/200\text{V}$

Parameters	Minimum	Typical	Maximum	Units	Notes
Frequency Range	10		51.2	MHz	
Standard Frequencies:	10.00, 12.80, 19.20, 20.00, 25.00, 26.00, 30.72, 40.00, 50.00			MHz	
Initial Frequency Tolerance (@+25°C) at shipping			±0.3	ppm	Relative to carrier
Frequency Stability Options					
-40°C to +85°C			±100	ppb	Option “1”
-50°C to +90°C			±280	ppb	Option “2” *Note 1
-55°C to +95°C			±500	ppb	Option “5” *Note 2
Frequency Stability vs. Supply Voltage Change (Vdd±5%):			±100	ppb	
Frequency Stability vs. Load Change (Load±5%):			±200	ppb	
Supply Voltage (Vdd):	+3.135	+3.3	+3.465	V	
Aging (first year @+25°C):			±1.0	ppm	
Aging (20 years @+25°C):		±3.0	±4.6	ppm	
Supply Current (Icc) (into 15pF load):		7.8	8.5	mA	@10MHz carrier
		8.7	9.5		@16.384MHz carrier
		13.7	14.5		@51.2MHz carrier
CMOS Output					
V _{OH} :	2.4			V	Load=15pF
V _{OL} :			0.4	V	Load=15pF
Load:			15	pF	
Duty Cycle:	45		55	%	@(V _{OH} - V _{OL})/2
Rise/Fall Time:			4	ns	Load=15pF
Waveform:	Square Wave				
RMS Jitter (12kHz to 20MHz BW)	0.4		1.3	ps	Carrier dependent
Phase Noise (10MHz carrier frequency @25 °C):			-95	dBc/Hz	Offset @10Hz
			-120		Offset @100Hz
			-140		Offset @ 1k Hz
			-145		Offset @10 kHz
			-150		Offset @100 kHz

*Note 1: For 10.000MHz carrier, frequency stability of ± 280 ppb is only guaranteed over -45°C to $+90^{\circ}\text{C}$ operating temperature range.

*Note 2: For 10.000MHz carrier, option "5" is not available.



OPTIONS & PART IDENTIFICATION: (left blank if standard)

AST3TQ - [] MHz - [] - []

Frequency in MHz
Please specify the frequency in MHz.
e.g. 19.200MHz






Freq. Stability vs. Operating Temp.
1: ± 100 ppb over -40 to +85°C
2: ± 280 ppb over -50 to +90°C *
5: ± 500 ppb over -55 to +95°C **

Packaging
Blank: Bulk
T: 500pcs/reel
T2: 2000pcs/reel

* Note 1: For 10.000MHz carrier, frequency stability of ± 280 ppb is only guaranteed over -45°C to +90°C operating temperature range.

**Note 2: For 10.000MHz carrier, option "5" is not available.


FREQUENCY STABILITY VS. TEMPERATURE

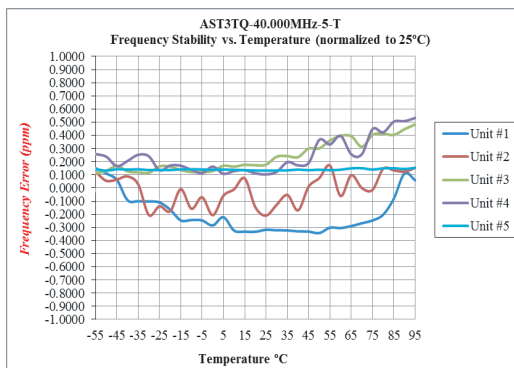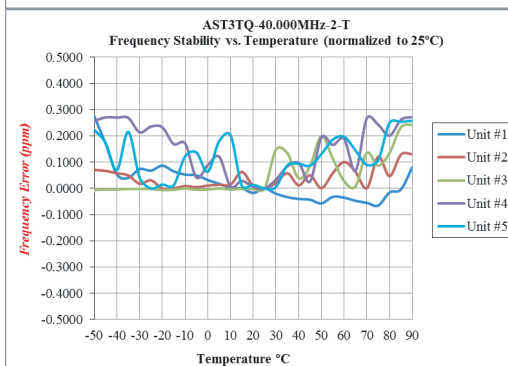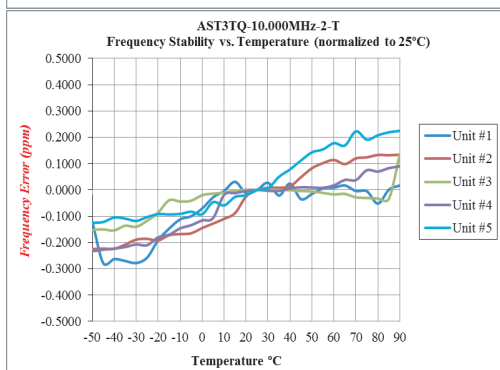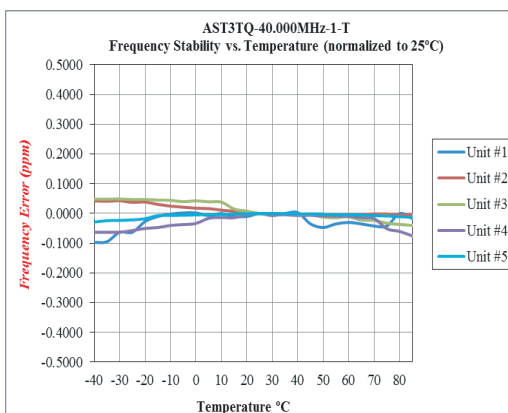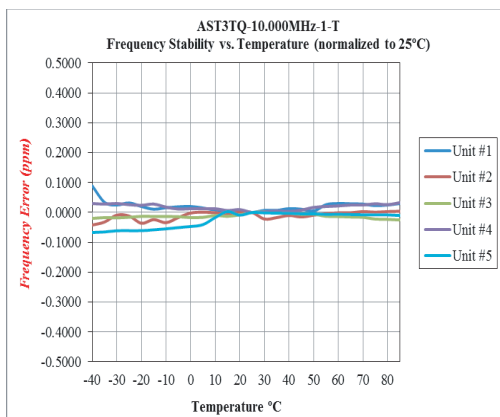




TYPICAL PHASE NOISE


10.00 MHz Carrier

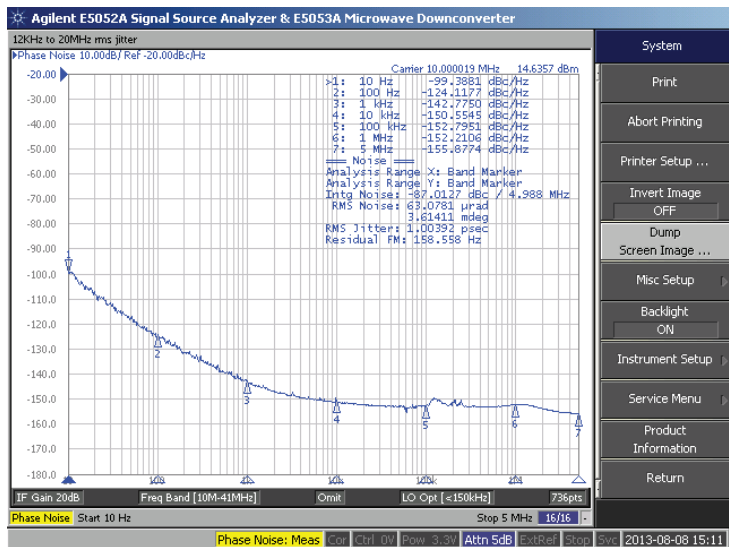

20.00 MHz Carrier

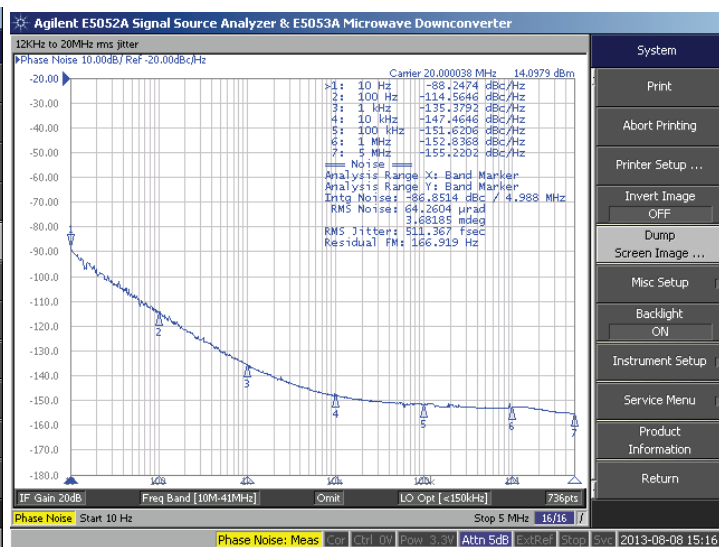


40.00 MHz Carrier

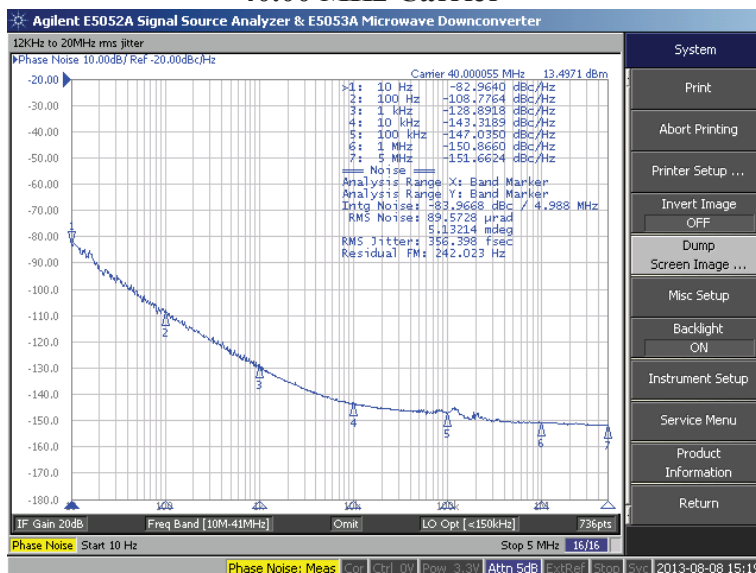




7.0 x 5.0 x 1.9mm

➤ **OUTLINE DIMENSION:**

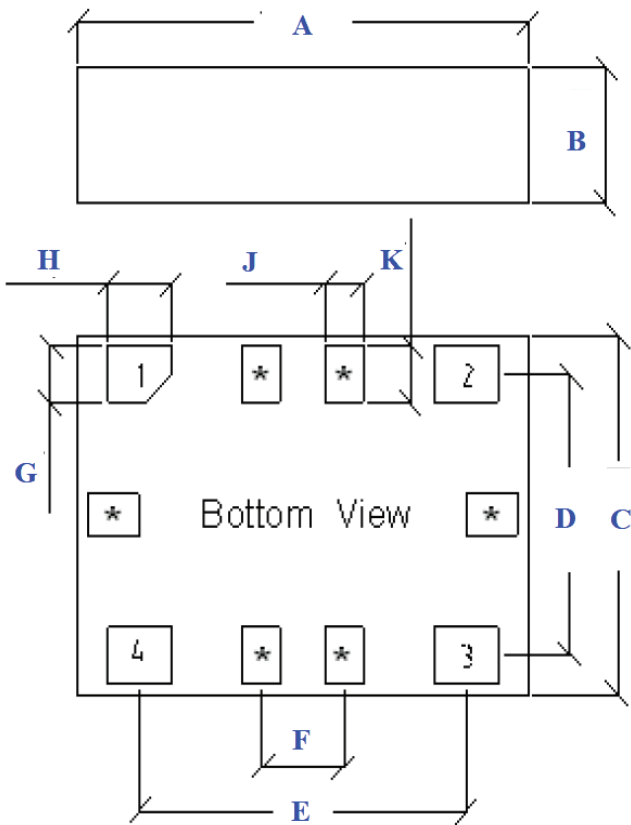

Letter	Dimension
A	7.1±0.2
B	1.9±0.2
C	5.0±0.2
D	3.90
E	5.08
F	1.27
G	1.00
H	1.50
J	0.60
K	1.00
M	3.90
N	5.08
P	4-1.2
Q	4-1.0

Recommended Land Pattern

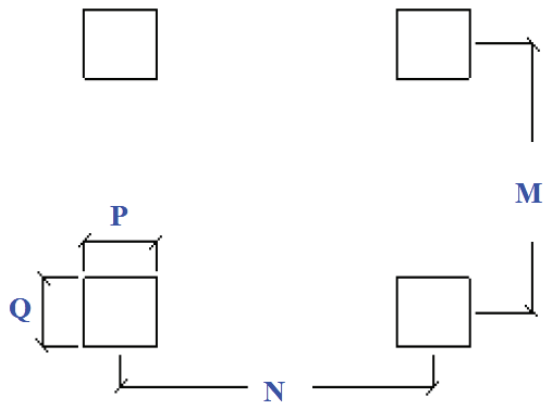


Pin	Function
1	NC
2	GND
3	Output
4	Vdd
*	For factory test only

Dimensions: mm



7.0 x 5.0 x 1.9mm

➤ REFLOW PROFILE:

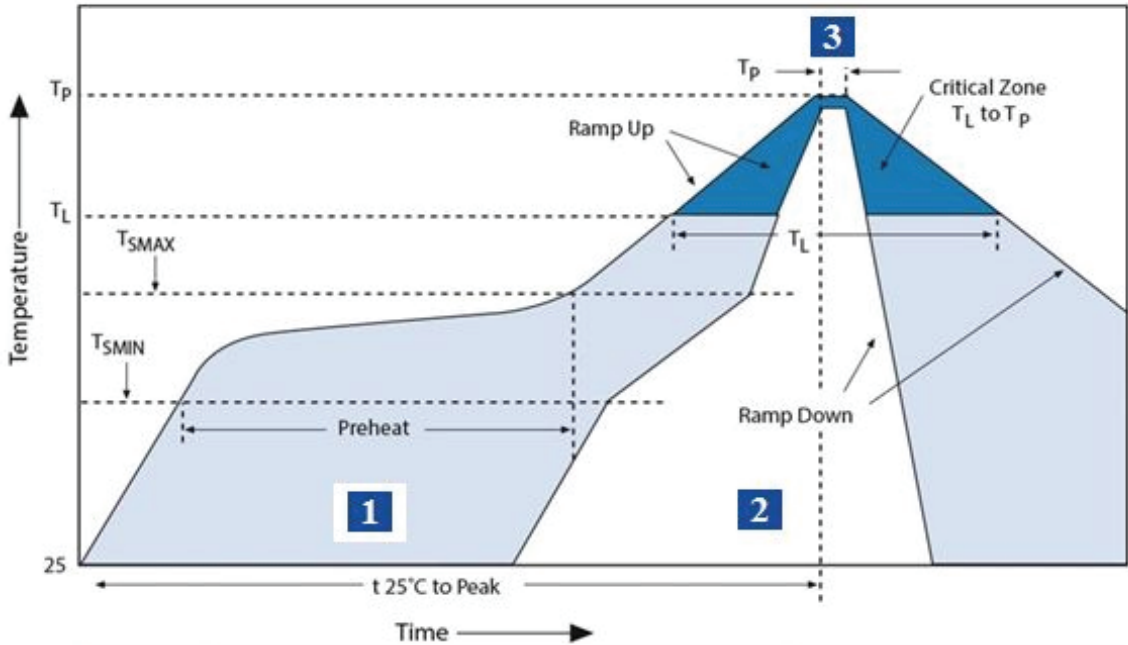

Zone	Description	Temperature	Times
1	Preheat	$T_{S_{MIN}} \sim T_{S_{MAX}}$ 150°C ~ 200°C	60 ~ 120 sec.
2	Reflow	T_L 220°C	60 ~ 150 sec.
3	Peak heat	T_P 260°C	25 sec. MAX




7.0 x 5.0 x 1.9mm

AST3TQ


RoHS/RoHS II Compliant

TAPE & REEL:

Packaging:
T: 500pcs/reel
T2: 2000pcs/reel
MSL-3 packaging applies to MOQ=25 units (cut tape) & T and T2.

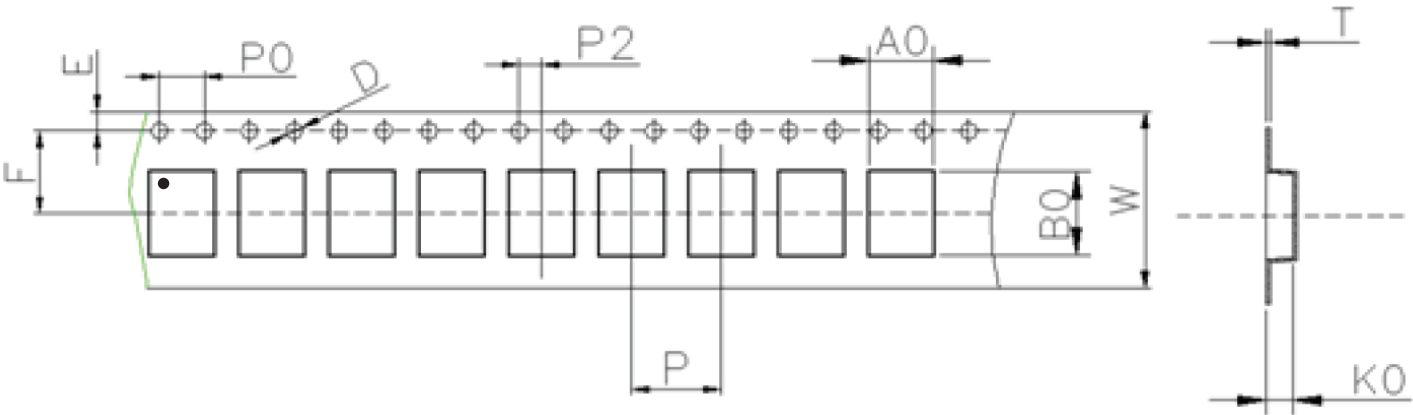

W	A0	B0	K0	P	F
16.0±0.3	5.7±0.15	7.6±0.15	2.4±0.15	8.0±0.1	7.5±0.1
E	D	P0	P2	T	
1.75±0.1	1.5+0.1/-0.0	4.0±0.1	2.0±0.1	0.3±0.05	

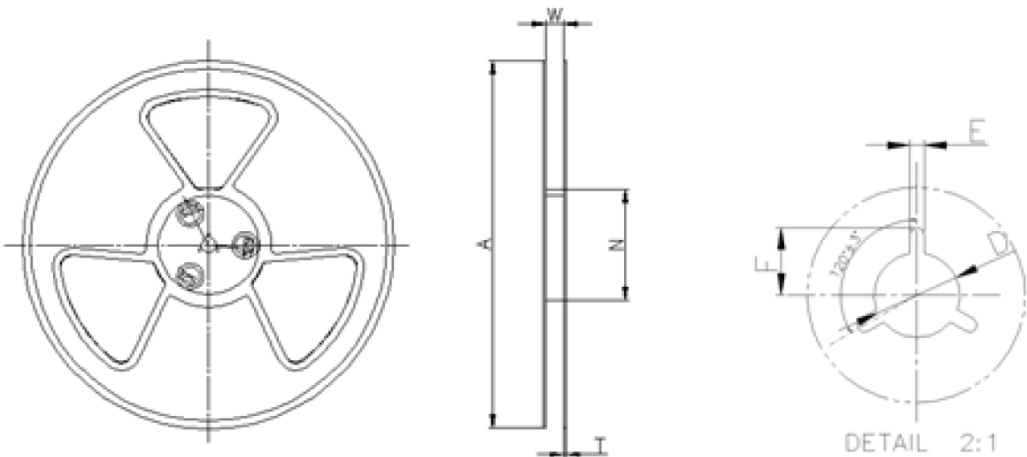

W	A	N	T	E	F	D
16.5±0.4	330±0.5	100±0.3	1.8±0.2	2.1±0.3	10.75±0.3	13.5+0.5/-0.2

Dimensions: mm

ATTENTION: Abracon LLC products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon’s products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon LLC is required. Please contact Abracon LLC for more information.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

ABRACON:

[AST3TQ-19.20MHz-2-T2](#) [AST3TQ-20.00MHz-5-T2](#) [AST3TQ-19.20MHz-1-T2](#) [AST3TQ-40.00MHz-5-T2](#) [AST3TQ-10.00MHz-5-T](#) [AST3TQ-20.00MHz-2-T2](#) [AST3TQ-25.00MHz-1](#) [AST3TQ-12.80MHz-1-T2](#) [AST3TQ-38.40MHz-2](#) [AST3TQ-12.80MHz-5-T](#) [AST3TQ-19.20MHz-1](#) [AST3TQ-26.00MHz-2-T2](#) [AST3TQ-30.72MHz-5](#) [AST3TQ-40.00MHz-1](#) [AST3TQ-19.20MHz-5-T2](#) [AST3TQ-20.00MHz-1](#) [AST3TQ-30.72MHz-2-T2](#) [AST3TQ-19.20MHz-5](#) [AST3TQ-20.00MHz-5-T](#) [AST3TQ-25.00MHz-2-T2](#) [AST3TQ-40.00MHz-1-T](#) [AST3TQ-12.80MHz-2](#) [AST3TQ-30.72MHz-1](#) [AST3TQ-40.00MHz-5](#) [AST3TQ-10.00MHz-5](#) [AST3TQ-10.00MHz-1](#) [AST3TQ-30.72MHz-1-T2](#) [AST3TQ-20.00MHz-5](#) [AST3TQ-25.00MHz-5-T2](#) [AST3TQ-10.00MHz-1-T](#) [AST3TQ-25.00MHz-1-T](#) [AST3TQ-30.72MHz-2-T](#) [AST3TQ-40.00MHz-2](#) [AST3TQ-38.40MHz-2-T](#) [AST3TQ-26.00MHz-5](#) [AST3TQ-38.40MHz-5](#) [AST3TQ-20.00MHz-1-T](#) [AST3TQ-26.00MHz-2-T](#) [AST3TQ-40.00MHz-1-T2](#) [AST3TQ-12.80MHz-2-T2](#) [AST3TQ-25.00MHz-1-T2](#) [AST3TQ-25.00MHz-5-T](#) [AST3TQ-26.00MHz-5-T2](#) [AST3TQ-19.20MHz-1-T](#) [AST3TQ-19.20MHz-2](#) [AST3TQ-38.40MHz-1](#) [AST3TQ-40.00MHz-5-T](#) [AST3TQ-26.00MHz-5-T](#) [AST3TQ-30.72MHz-1-T](#) [AST3TQ-26.00MHz-1](#) [AST3TQ-20.00MHz-2](#) [AST3TQ-10.00MHz-2](#) [AST3TQ-10.00MHz-2-T](#) [AST3TQ-12.80MHz-1-T](#) [AST3TQ-30.72MHz-5-T2](#) [AST3TQ-10.00MHz-2-T2](#) [AST3TQ-20.00MHz-2-T](#) [AST3TQ-38.40MHz-1-T2](#) [AST3TQ-26.00MHz-1-T2](#) [AST3TQ-38.40MHz-2-T2](#) [AST3TQ-38.40MHz-5-T](#) [AST3TQ-25.00MHz-5](#) [AST3TQ-26.00MHz-2](#) [AST3TQ-38.40MHz-5-T2](#) [AST3TQ-10.00MHz-5-T2](#) [AST3TQ-10.00MHz-1-T2](#) [AST3TQ-19.20MHz-5-T](#) [AST3TQ-25.00MHz-2-T](#) [AST3TQ-12.80MHz-1](#) [AST3TQ-19.20MHz-2-T](#) [AST3TQ-38.40MHz-1-T](#) [AST3TQ-40.00MHz-2-T](#) [AST3TQ-40.00MHz-2-T2](#) [AST3TQ-12.80MHz-5-T2](#) [AST3TQ-25.00MHz-2](#) [AST3TQ-12.80MHz-2-T](#) [AST3TQ-12.80MHz-5](#) [AST3TQ-20.00MHz-1-T2](#) [AST3TQ-26.00MHz-1-T](#) [AST3TQ-30.72MHz-2](#) [AST3TQ-30.72MHz-5-T](#) [AST3TQ-10.00MHz-1](#) [AST3TQ-10.00MHz-1-T](#) [AST3TQ-10.00MHz-1-T2](#) [AST3TQ-10.00MHz-2](#) [AST3TQ-10.00MHz-2-T](#) [AST3TQ-10.00MHz-2-T2](#) [AST3TQ-40.00MHz-2-T2](#) [AST3TQ-40.00MHz-5](#) [AST3TQ-40.00MHz-5-T](#) [AST3TQ-40.00MHz-5-T2](#) [AST3TQ-38.40MHz-5-T2](#) [AST3TQ-40.00MHz-1](#) [AST3TQ-40.00MHz-1-T](#) [AST3TQ-40.00MHz-1-T2](#) [AST3TQ-40.00MHz-2](#) [AST3TQ-40.00MHz-2-T](#) [AST3TQ-38.40MHz-1-T2](#) [AST3TQ-38.40MHz-2](#) [AST3TQ-38.40MHz-2-T](#)