



# TRH50A SERIES

## 50W SWITCHING ADAPTER



### Features

- \* Universal Input Range 90~264VAC
- \* Meets EN55022 Class B and CISPR/FCC Class B
- \* Continuous Short Circuit Protection
- \* Over Voltage Protection
- \* Meet CoC Tier 2 & DoE Level VI  
(Output Cable Length  $\leq$  1800mm)  
(TRH50A120, TRH50A150: Output Cable Length  $\leq$  1220mm)  
(TRH70A180, TRH70A190: Output Cable Length  $\leq$  1800mm 16AWG)
- \* No load Power Consumption < 150mW

### Ordering information

TRH50XXX	- XX	E	XX
Model No.	DC Plug Type	OVP	DC Cable Length and Type
			01: 720mm
			02: 1220mm
			03: 1800mm
			11: 720mm with Ferrite Core
			12: 1220mm with Ferrite Core
			13: 1800mm with Ferrite Core
			* 16AWG / UL1185 FOR 12V,15V,18V,19V
			* 18AWG / UL1185 FOR 24V,28V,36V,48V



MODEL	OUTPUT VOLTAGE	OUTPUT CURRENT	RIPPLE & NOISE NOTE 1	VOLTAGE ACCURACY NOTE 2	LINE REGULATION NOTE 3	LOAD REGULATION NOTE 4	AVERAGE EFFICIENCY min. NOTE 5
TRH50A120	12V	4.2A	1%	$\pm 2\%$	$\pm 1\%$	$\pm 3\%$	89%
TRH50A150	15V	3.36A	1%	$\pm 2\%$	$\pm 1\%$	$\pm 3\%$	89%
TRH50A180	18V	2.8A	1%	$\pm 2\%$	$\pm 1\%$	$\pm 2\%$	89%
TRH50A190	19V	2.65A	1%	$\pm 2\%$	$\pm 1\%$	$\pm 2\%$	89%
TRH50A240	24V	2.1A	1%	$\pm 2\%$	$\pm 1\%$	$\pm 2\%$	89%
TRH50A280	28V	1.8A	1%	$\pm 2\%$	$\pm 1\%$	$\pm 2\%$	89%
TRH50A360	36V	1.4A	1%	$\pm 2\%$	$\pm 1\%$	$\pm 2\%$	89%
TRH50A480	48V	1.05A	1%	$\pm 2\%$	$\pm 1\%$	$\pm 2\%$	89%

## Specifications

### INPUT SPECIFICATIONS:

Voltage ..... 90~264Vac  
 Frequency ..... 47 to 63Hz  
 Input Current ..... 1.2A max.  
 Inrush Current ..... Cold Start @25°C 100A max. @ 240Vac  
 Leakage Current ..... 3.5mA max.

### OUTPUT SPECIFICATIONS:

Hold-up Time ..... 8ms typ. @115Vac  
 Short Circuit Protection ..... Continuous(Auto Recovery)  
 Over Voltage Protection ..... TVS Component to Clamp  
 Temperature Coefficient ..... ±0.05%/°C

### GENERAL SPECIFICATIONS:


Isolation ..... Input to output = 4,242VDC  
 Operating Temperature ..... -20 ~ 70°C (see derating curve)  
 Storage Temperature ..... -20 ~ 85°C  
 Humidity ..... 93% RH max. Non condensing  
 Cooling ..... Natural Convection  
 Switching Frequency ..... 65KHz Typical  
 MTBF ..... MIL-HDBK-217F, GB, at 25°C/115VAC ..... 200Khrs min.  
 Altitude ..... 5000m  
 Dimensions ..... 4.724x2.047x1.220 inches (120.00x52.00x31.00mm)  
 Weight ..... 300g  
 AC Inlet ..... IEC320/C14

### SAFETY AND EMC:


Emission and Immunity ..... EN55022 Class B, FCC Part 15 Class B  
 EN61000-6-3, EN61000-3-2, EN61000-3-3  
 EN55024, EN61204-3, EN61000-6-1  
 Safety ..... Class I, IEC60950-1, EN60950-1, UL60950-1

## Mechanical Specification

All Dimensions are in inches(mm)  
 Tolerance:Inches:X.XXX±0.02  
 Millimeters:X.XX±0.5

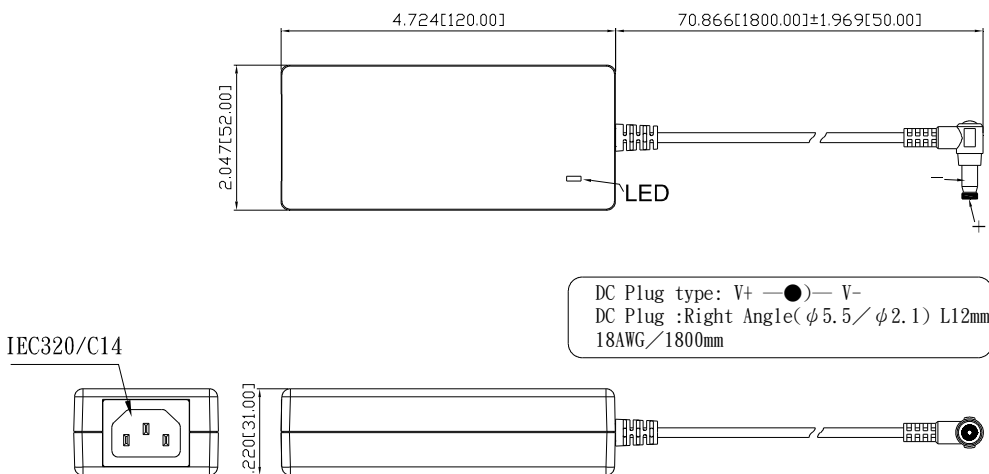

## TRH50A Series Derating Curve

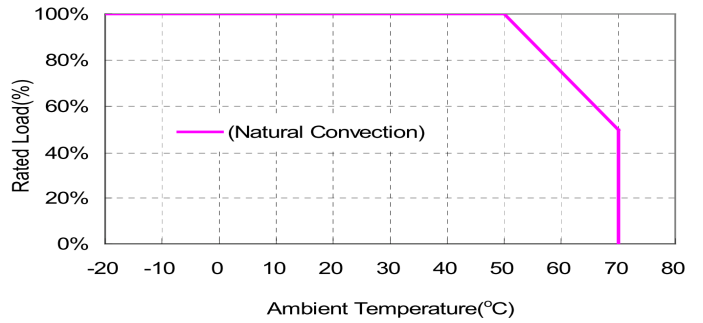

### NOTE:

1. Add a 0.1uF ceramic capacitor and a 10uF E.L. capacitor to output for Ripple & Noise measuring @20MHz BW.
2. Voltage setpoint at 60% full load.
3. Line regulation measured from 100Vac to 240Vac full load.
4. Load regulation measured from 60% to full load and from 60% to 20% load (60% +/- 40% load).
5. Average Efficiency measured at 25%,50%,75%,100% load and input voltage is 115Vac / 230Vac.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Cincon:

<a href="#">TRH50A150-01E02-Level-VI</a>	<a href="#">TRH50A120-11E01-Level-VI</a>	<a href="#">TRH50A120-49E01-Level-VI</a>	<a href="#">TRH50A180-12E03-Level-VI</a>
<a href="#">TRH50A150-11E02-Level-VI</a>	<a href="#">TRH50A190-11E03-Level-VI</a>	<a href="#">TRH50A120-48E01-Level-VI</a>	<a href="#">TRH50A240-39E03-Level-VI</a>
<a href="#">TRH50A120-12E01-Level-VI</a>	<a href="#">TRH50A150-48E02-Level-VI</a>	<a href="#">TRH50A180-02E03-Level-VI</a>	<a href="#">TRH50A240-35E03-Level-VI</a>
<a href="#">TRH50A120-40E01-Level-VI</a>	<a href="#">TRH50A150-12E02-Level-VI</a>	<a href="#">TRH50A190-12E03-Level-VI</a>	<a href="#">TRH50A240-40E03-Level-VI</a>
<a href="#">TRH50A240-01E03-Level-VI</a>	<a href="#">TRH50A150-40E02-Level-VI</a>	<a href="#">TRH50A120-39E01-Level-VI</a>	<a href="#">TRH50A240-48E03-Level-VI</a>
<a href="#">TRH50A480-11E03-Level-VI</a>	<a href="#">TRH50A480-02E03-Level-VI</a>	<a href="#">TRH50A180-01E03-Level-VI</a>	<a href="#">TRH50A480-01E03-Level-VI</a>
<a href="#">TRH50A120-02E01-Level-VI</a>	<a href="#">TRH50A240-49E03-Level-VI</a>	<a href="#">TRH50A150-36E02-Level-VI</a>	<a href="#">TRH50A150-12E12-Level-VI</a>
<a href="#">TRH50A190-01E03-Level-VI</a>	<a href="#">TRH50A240-02E03-Level-VI</a>	<a href="#">TRH50A240-11E03-Level-VI</a>	<a href="#">TRH50A120-35E01-Level-VI</a>
<a href="#">TRH50A120-36E01-Level-VI</a>	<a href="#">TRH50A190-02E03-Level-VI</a>	<a href="#">TRH50A240-36E03-Level-VI</a>	<a href="#">TRH50A150-35E02-Level-VI</a>
<a href="#">TRH50A240-12E03-Level-VI</a>	<a href="#">TRH50A150-49E02-Level-VI</a>	<a href="#">TRH50A150-39E02-Level-VI</a>	<a href="#">TRH50A180-11E03-Level-VI</a>
<a href="#">TRH50A150-02E02-Level-VI</a>	<a href="#">TRH50A480-12E03-Level-VI</a>	<a href="#">TRH50A120-01E01-Level-VI</a>	<a href="#">TRH50A120-11E11-Level-VI</a>
<a href="#">TRH50A240-01E12-LEVEL-VI</a>	<a href="#">TRH50A360-01E12-Level-VI</a>	<a href="#">TRH50A360-35E03-Level-VI</a>	<a href="#">TRH50A360-40E03-Level-VI</a>
<a href="#">TRH50A360-01E03-Level-VI</a>	<a href="#">TRH50A360-11E03-Level-VI</a>	<a href="#">TRH50A360-12E03-Level-VI</a>	<a href="#">TRH50A360-39E03-Level-VI</a>
<a href="#">TRH50A360-48E03-Level-VI</a>	<a href="#">TRH50A360-49E03-Level-VI</a>	<a href="#">TRH50A360-02E03-Level-VI</a>	<a href="#">TRH50A120-11E02-Level-VI</a>
<a href="#">TRH50A360-36E03-Level-VI</a>	<a href="#">TRH50A120-12E02-Level-VI</a>	<a href="#">TRH50A240-12E13-Level-VI</a>	<a href="#">TRH50A280-01E12-Level-VI</a>